




Automated System for Magnetic Bead-Based Purification

**Hands off
processing of
up to 16
samples**

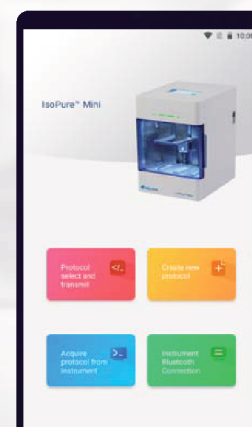

- *Fast, reliable, & reproducible results*
- *Compatible with all popular magnetic bead kits*
- *Compact (8 x 10 in footprint)*
- *Process up to 16 samples*
- *Android app & PC software for programming*
- *Sample volume 50uL - 1000uL*

Magnetic bead-based purification has become a preferred method for isolating DNA, RNA, and other target molecules from a variety of biological sample types. The quality and quantity of the extracted molecules can be significantly higher than other methods, such as spin columns, while the cost per sample can be lower. The **IsoPure™ Mini** from Accuris Instruments is a compact, automated purification system that improves efficiency and reproducibility using the magnetic bead-based method. Capable of processing up to 16 samples at one time, the instrument is easy to set up, program, and operate. Mixing, magnetic bead transfer, washing, and elution steps are performed automatically, saving valuable hands-on time. The purification process can be completed within 10 to 60 minutes depending on the type of reagent kit used and the complexity of the program.

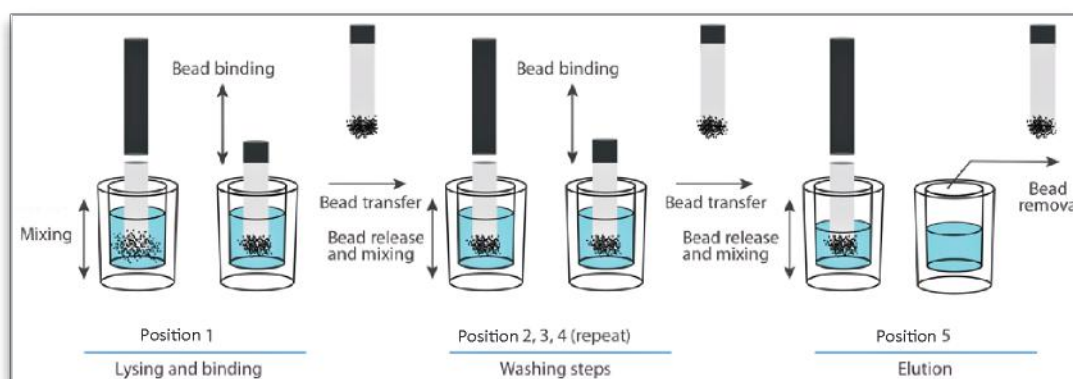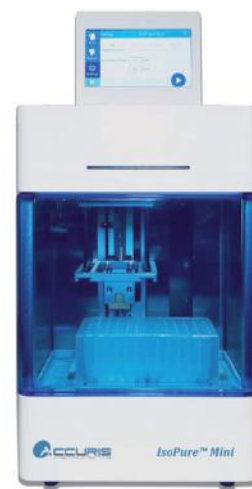

Typical Purification Process

Programming via Android™ App or PC Software

Creating a protocol is simple using the IsoPure app or PC software, both are included on a USB flash drive with each instrument. Mixing speed, sample temperature, and magnetization parameters can be all programmed. Protocols created using the IsoPure app can be transferred to the instrument via Bluetooth connection. Protocols created using the PC software can be transferred to the instrument via USB connection. In addition, both the IsoPure app and PC software can generate a protocol-specific QR code for instant transfer.



Create programs using any Android device, transfer via bluetooth

QR code Scanning System

A handheld scanner is included with each IsoPure Mini, adding a convenient and fast method for loading a protocol onto the instrument. After creating or opening a protocol on a companion Android device or a connected PC, an option is available for displaying a QR code. Simply scan the QR code to instantly transfer the protocol. QR codes are also available in kit instruction manuals for instant loading of optimized protocol.



Scanning QR code from app

Protocol Optimization

Accuris Instruments has partnered with leading magnetic bead kit manufacturers to develop and optimize protocols for specific applications. To request protocols for specific kits, or for assistance in optimization, please contact the IsoPure™ Technical Support Team at info@accuris-usa.com.

Sample Temperature Control

Heating sample mixtures during the lysis and elution steps can significantly improve results. Heating strips on the sample platform can be precisely set to any temperature between ambient +5°C to 120°C. Both deep well plates and 6-well reagent vessels fit into the contoured heating strips for efficient heat transfer. Two cooling fans maintain ambient temperature inside the housing and temperature of the heating strips.



Heating strips for lysis & elution




Ports for Mouse, Scanner, Storage and Transfer

Connection Ports

The IsoPure Mini can store up to 100 program files in internal memory. These can be transferred between instruments or to a computer for storage or sharing. Simply insert the included flash drive to export the selected files. Internal protocol management can be done via the instrument touch screen, or by using the included mouse.

UV Sterilization


An ultraviolet sterilization lamp (UVC) inside the processing chamber provides effective elimination of most bacterial, viral and stray genomic DNA contaminants. This additional safeguard reduces the possibility of contamination and downstream amplification of unwanted targets.

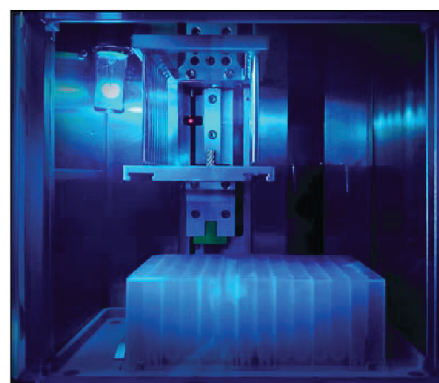

UV Sterilization

Touch-Screen Control Panel

The control panel on top of the IsoPure Mini allows for quick selection of stored protocols and instrument control. To execute a protocol, select it from the file list, insert a prepared sample plate (or 6-well reagent vessel) and tip combs, and press the start button. Run parameters and operating status are displayed during sample processing.

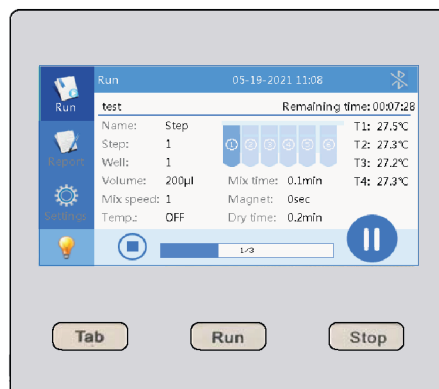

Touch screen control panel

IsoPure™ Consumables

Accuris offers magnetic tip combs, deep well plates, and 6-well sample strips designed to fit the IsoPure Mini. Produced using virgin polypropylene and packaged in a sterile environment, these consumables are guaranteed to be contaminant-free. The 8-place magnetic tip combs lock into position inside the instruments processing chamber. There are 2 options for sample vessels: 96 deep-well plates can be used for processing up to 16 samples. For 8 or fewer samples, 6-well sample strips can be used, and these are loaded onto the included aluminum rack. These sample strips reduce waste and lower consumable costs when only a few samples need to be processed.



Deep-well plate for processing up to 16 samples



6-well sample strips loaded in aluminum rack



96 deep well plate



Aluminum rack



6-well sample strip



8-place tip comb

Specifications:

Display:	4.3 inch-color touch screen
Capacity / sample volume:	16 samples / 50µL to 1,000µL
Magnetic bead recovery rate:	>95%
Lysis temperature range:	Ambient +5°C to 120°C
Elution temperature range:	Ambient +5°C to 120°C
Mixing speed:	Variable, 10 levels
Programming control:	Bluetooth-enabled android device (not included)
Program memory:	100 programs (internal memory)
Communication ports:	USB for mouse, file storage & transfer
Internal lighting:	LED
Contamination control:	UV lamp (3W, 253.7nm UVC wavelength)
Program transfer:	Bluetooth, QR scanner, USB flash drive
Dimensions:	7.9 x 10.2 x 11.8 in. (20 x 26 x 30 cm)
Weight:	7.0 kg / 15.4 lbs
Electrical input:	Universal 120 to 240VAC
Warranty:	2 years

Cat No.	Description	UOM
ES59800-MINI	IsoPure™ Mini, Automated Purification System, 120V-240V input	Each